

J = chip has serial jtag connection to Service Processor HW

□ dotted box indicates remote chip or device inaccessible to SP via jtag

◄► dotted line indicates connections to and between remote chips & devices

Figure 1

817
aws920610223w

50

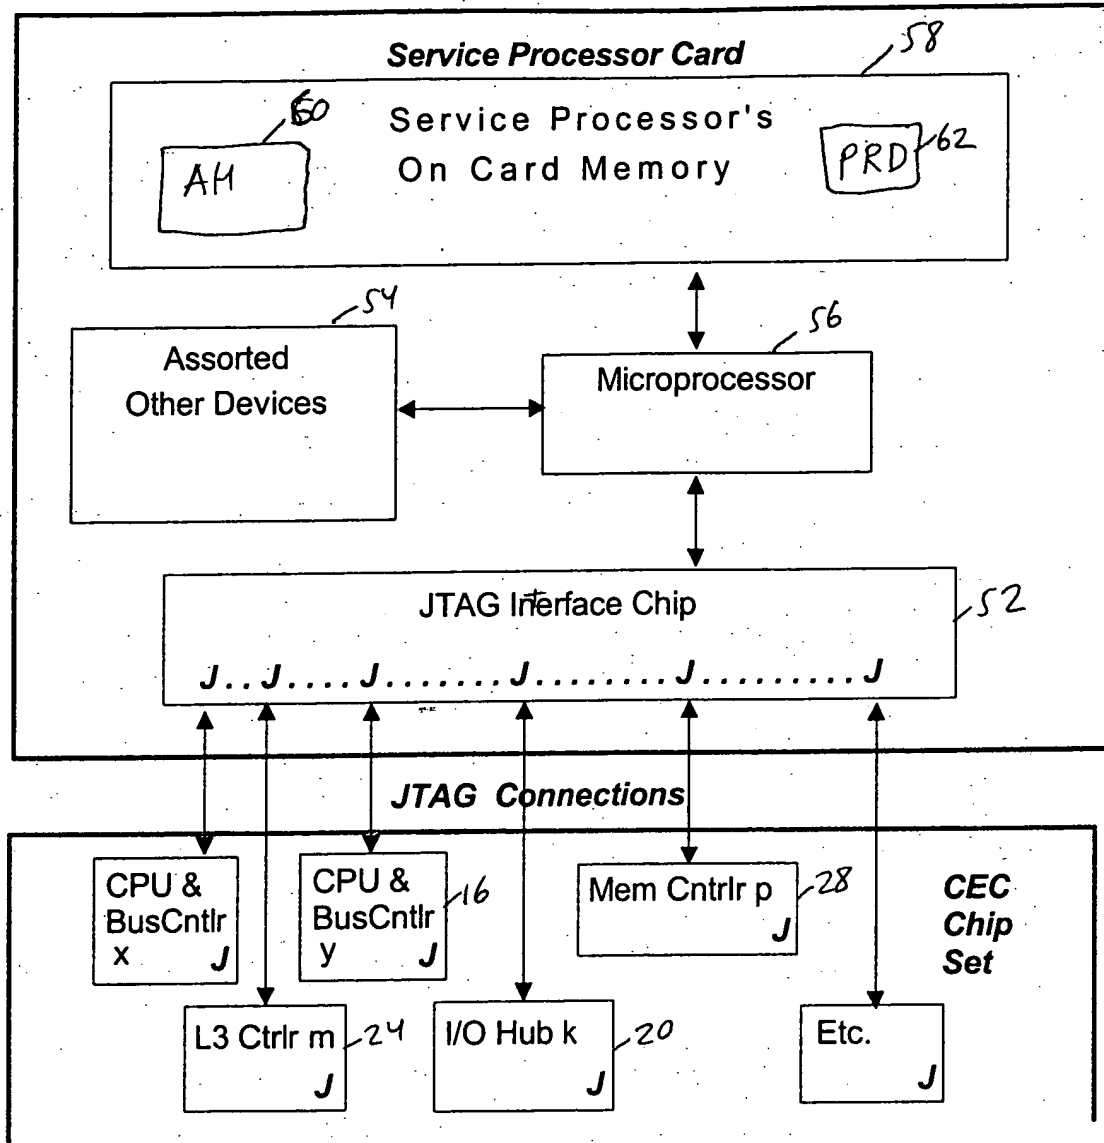
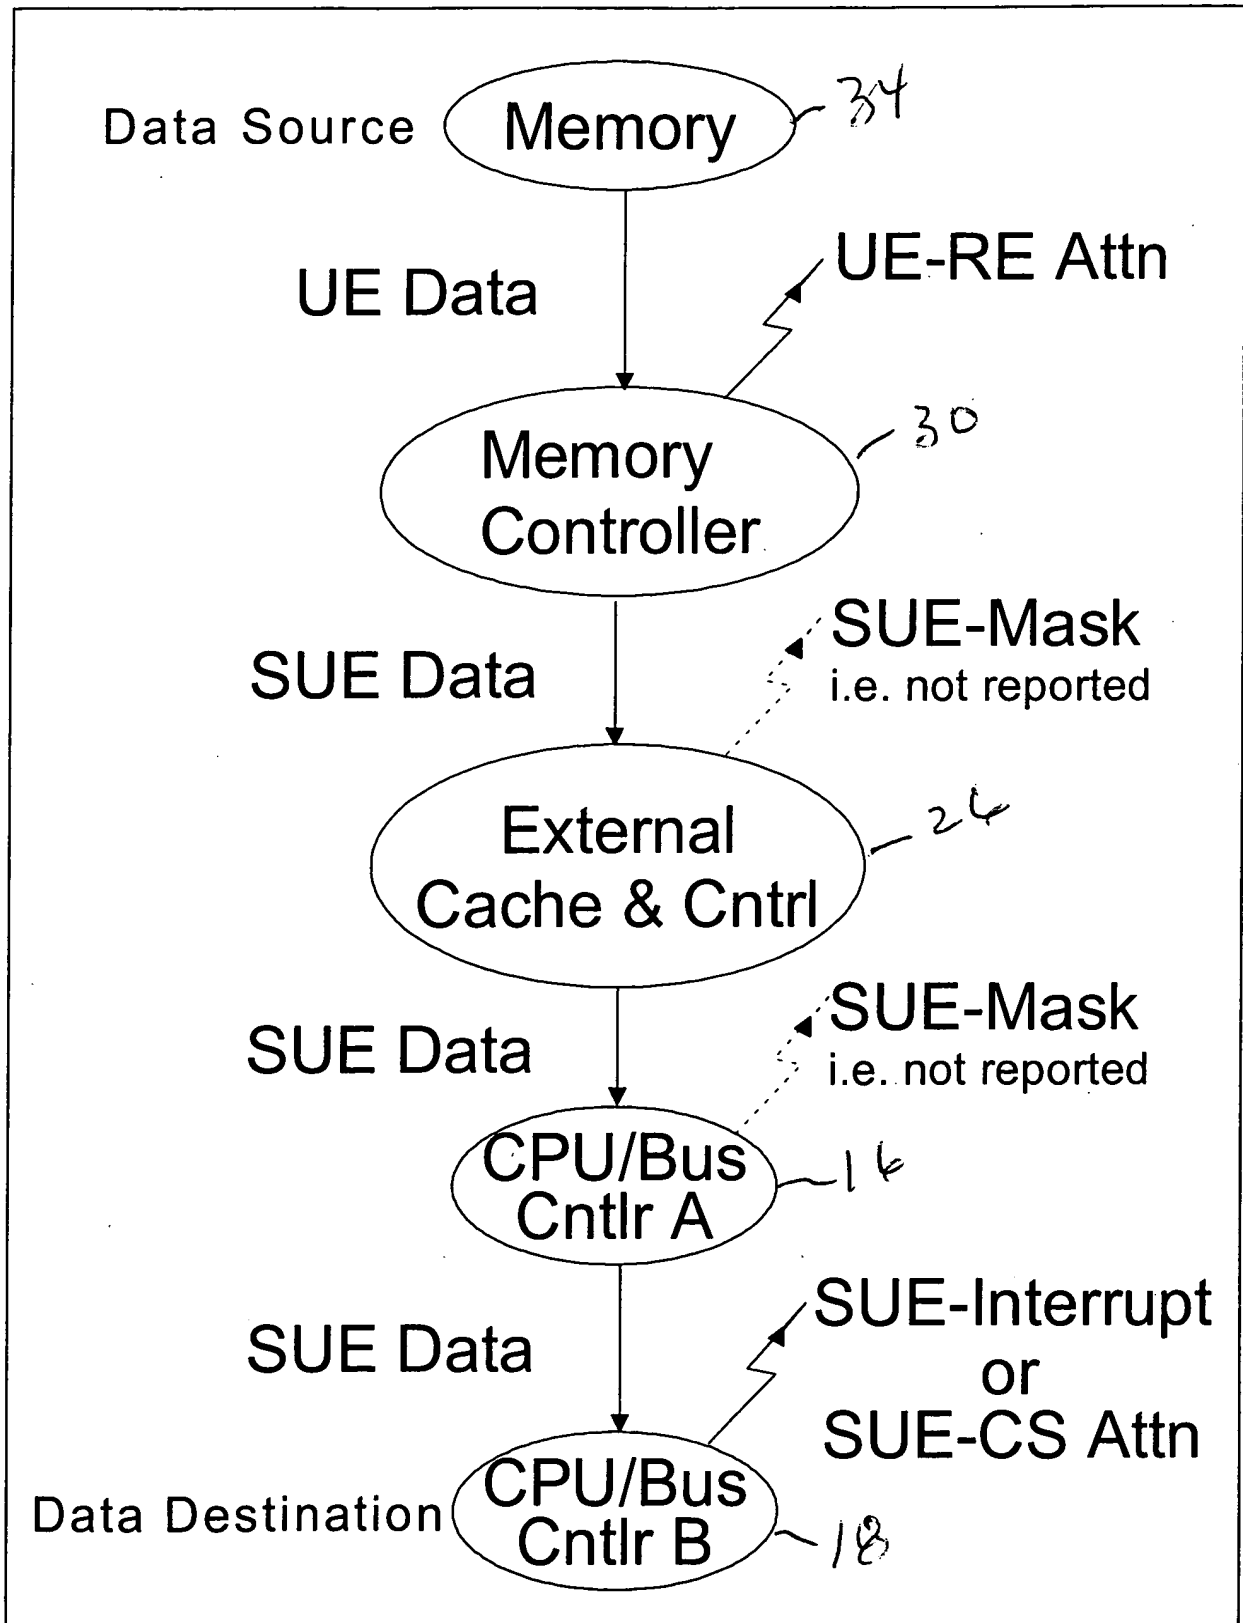


Figure 2

Figure 3



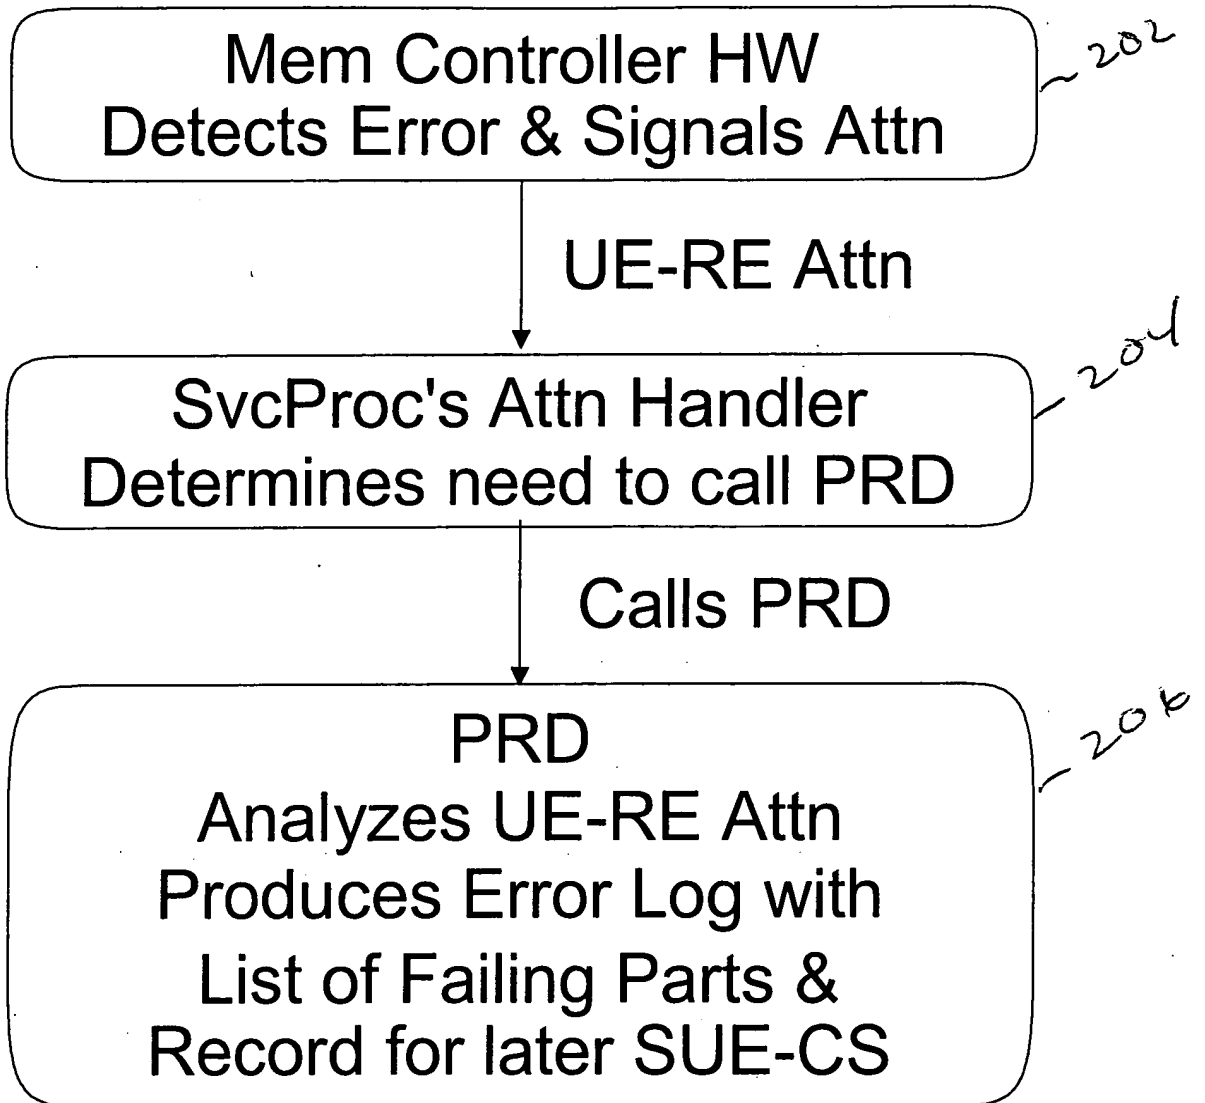


Figure 4

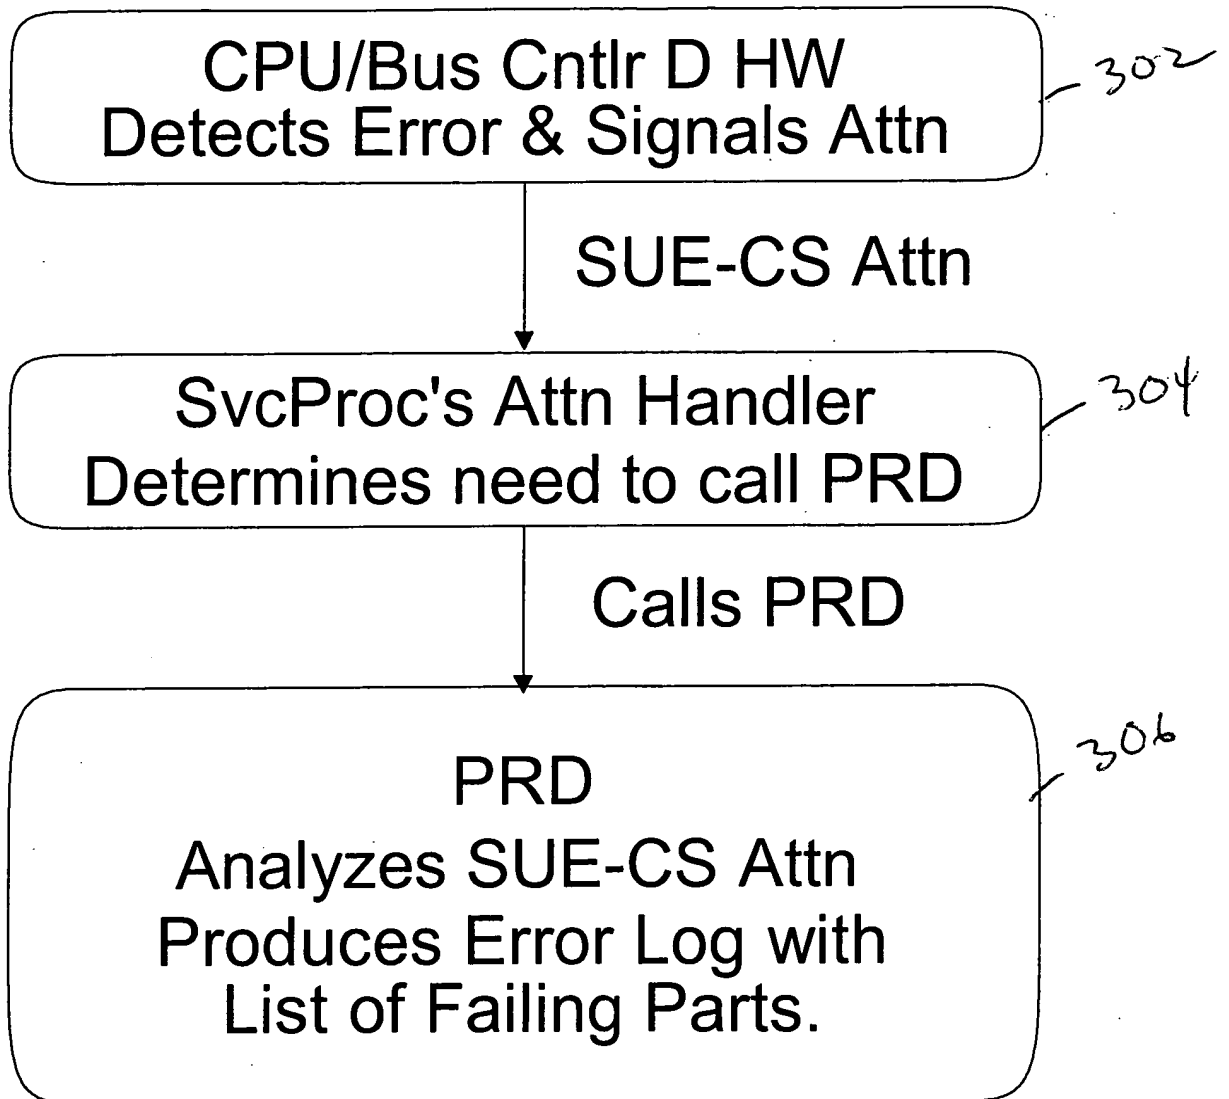


Figure 5

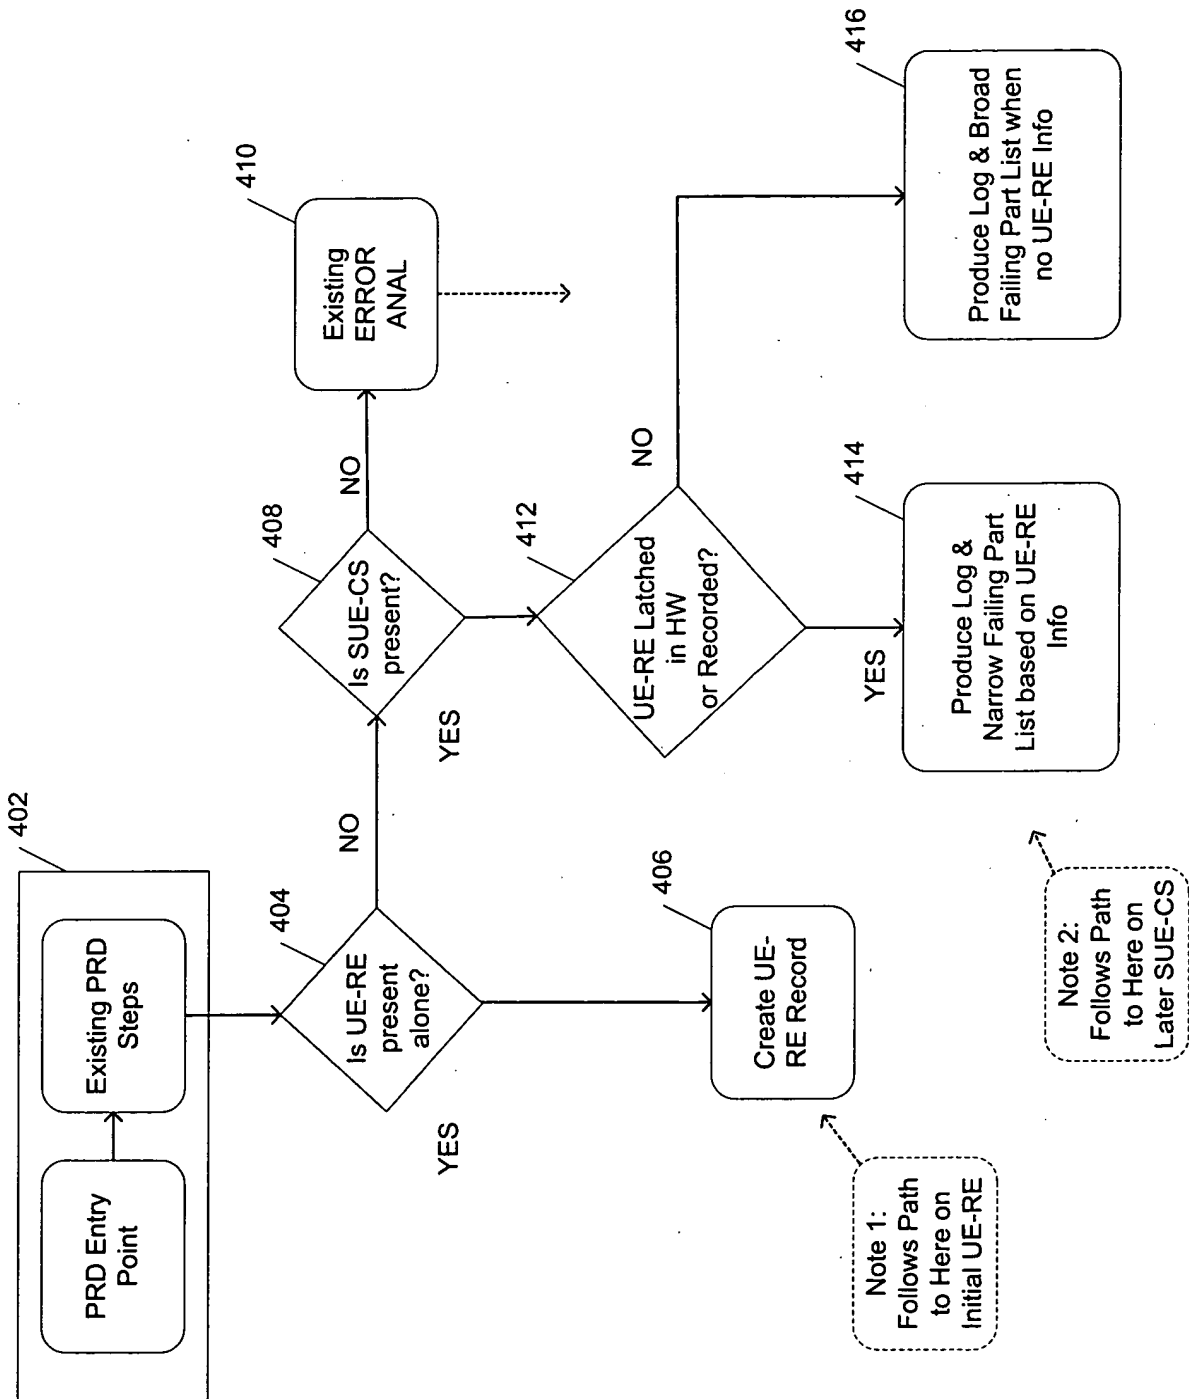


Figure 6

Figure 7

